


## alpha Value Line - NPT Sizing and Technical Data

Efficient  
Flexible  
Reliable



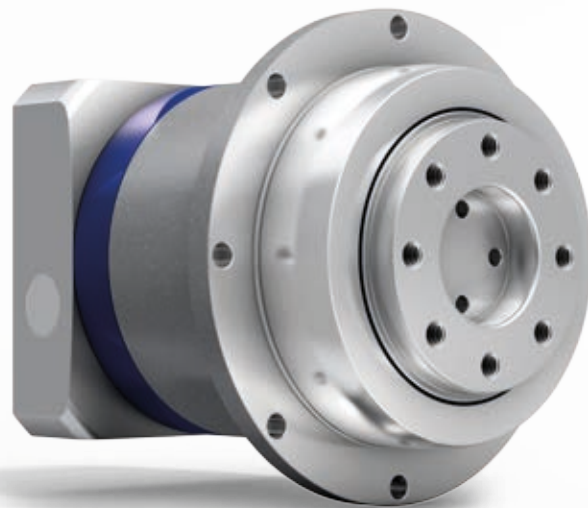

alpha Value Line	NP	NPS	NPL	NPT	NPR
<b>Ratios</b>	3-100				
Torsional backlash [arcmin]	≤ 8				
<b>Output type</b>					
Smooth output shaft	•	•	•	–	•
Grooved output shaft	•	•	•	–	•
Output shaft with involute tothing	–	•	•	–	•
Output flange	–	–	–	•	–
<b>Input type</b>	<b>Motor attachment version</b>				
<b>Application</b>					
For high axial and radial forces	–	•	•	–	•
In continuous operation	•	•	•	•	–
In cyclic operation	•	•	•	•	•
<b>Options</b>					
HIGH TORQUE version	•	•	•	•	•
Foodgrade lubrication	•	•	•	•	•
With coupling at output	•	•	•	•	•
As linear system	•	•	•	–	•
With mounted pinion at output	•	•	•	–	•
With screwed on B5 flange	•	–	–	–	–
<b>Further technical data</b>					
Max. torque $T_{2a}$	Nm	800	800	800	800
	in.lb	7100	7100	7100	7100
Max. input speed	rpm	10000	8000	8000	10000
Efficiency	%	97%	97%	97%	97%
Max. radial force $F_{2R}$	N	8000	9900	9900	4800
	lb <sub>r</sub>	1800	2200	2200	1080

# WITTENSTEIN alpha adapted for any axis

The perfect drive solution whatever  
the requirements are

WITTENSTEIN alpha develops complete, single-supplier solutions for driving any axis. They can be used in virtually any application – from high-precision axes in machine tools and manufacturing systems to packaging machinery where maximum productivity is a must.

The name WITTENSTEIN alpha is synonymous with premium quality and optimal reliability, high precision and synchronization accuracy, maximum power density, a long lifetime and very simple motor mounting.

The alpha Value Line is a new product family that unites these characteristics – which are specially adapted for applications in the value segment or high-end secondary axes – in a class-appropriate way.

## Benefits of the alpha Value Line:

- Rapid availability regardless of the batch size
- Optimal flexibility
- Ability to react promptly to changing customer requirements
- Assembly to order

## Contents

Sizing of the alpha Value Line – NPT	4
NPT 005S	6
NPT 015S	8
NPT 025S	10
NPT 035S	12
NPT 045S	14
Glossary	16
Order codes	17

# alpha Value Line


## Efficient sizing

### The new sizing method


The new alpha Value Line from WITTENSTEIN alpha commits the cymex® sizing software to paper. Using a quick select structure, you can define your drive train in just a few simple steps.

- Quick and easy gearhead selection based on your application.
- Maximum transmissible torque  $T_{2a}$  as the starting point for selecting the gearhead (definition  $T_{2a} \neq T_{2B}$ ).  
No restriction on  $T_{2a}$  due to a maximum number of cycles per hour.
- Optional: Quick selection based on the maximum motor torque.


#### Your application

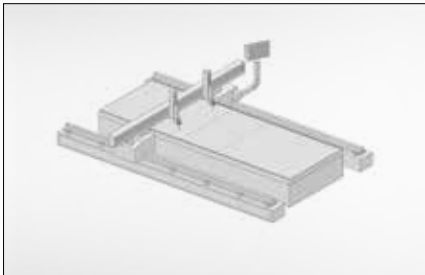


#### Determine application torque

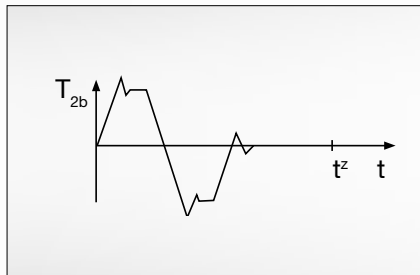

#### Define system utilization

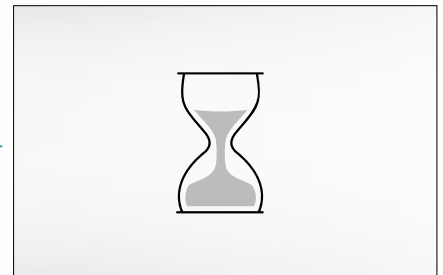

#### Calculate equivalent application torque

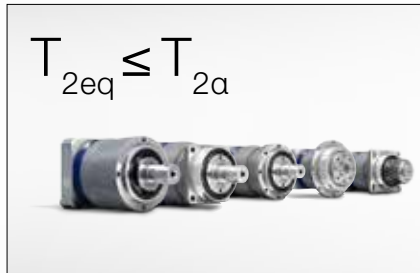

#### Select gearhead

### Your Benefits:

- Perfect-fit sizing of your drive
- Efficient and reliable gearhead selection
- Huge time saving
- Computational work for simple applications reduced to a minimum\*
- Consideration of radial and axial forces if necessary

\*We recommend our cymex® sizing software for complex applications

# Sizing of the alpha Value Line – NPT

**A:** Simplified sizing for servo motors based on the maximum motor torque:  $M_{max} * i \leq T_{2\alpha}$

**B:** Sizing based on the application

## Step 1:

Determine the maximum application torque:  $T_{2b} = \text{_____} \text{ [Nm]}$


## Step 2:

Determine the operating mode factor  $K_M = \text{_____}$

Typical applications	Cycle	Torque characteristic	Operating mode factor $K_M$
Format changing, e.g. in packaging machines, drives for processing equipment, actuators, etc.	<b>S5 operation:</b> Low duty cycle Small number of cycles Low dynamics		1,0
Tool changers with low dynamics, pick & place gantry axes, tire building machines, etc.	<b>S5 operation:</b> Medium duty cycle Small number of cycles Medium dynamics		1,6
Linear modules, linear axes in woodworking machines, ball screw drives, etc.	<b>S5 operation:</b> Medium duty cycle Medium number of cycles Medium dynamics		1,9
Roller drives in printing presses, star drives in rackers, etc.	<b>S1 operation:</b> High duty cycle		2,2
Linear axes in plasma, laser or water jet cutters, portals, tool changers with high dynamics	<b>S5 operation:</b> Medium duty cycle Medium number of cycles High dynamics		2,5
SCARA robots, gantry robots, machining spindles, etc.	<b>S5 operation:</b> High duty cycle High number of cycles High dynamics		3,0

## Step 3:

Determine the sizing factor with the operating mode factor  $K_M$   $f_a = \text{_____}$

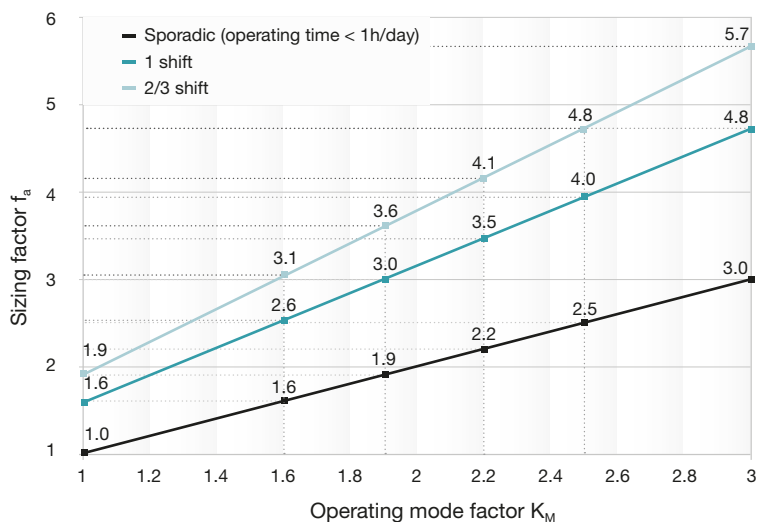

## Step 4:

Compare the equivalent application torque with the maximum gearhead  $T_{2\alpha}$  (see table, Step 5)

$$T_{2\_eq} = f_a * T_{2b} \leq T_{2\alpha}$$

$$T_{2\_eq} = \text{_____} * \text{_____} \leq T_{2\alpha}$$

$$T_{2\_eq} = \text{_____} \text{ [Nm]} \leq \text{_____} \text{ [Nm]}$$

## Step 5: Quick selection of the technical data

		NPT 005		NPT 015		NPT 025		NPT 035		NPT 045		
		1-stage	2-stage	1-stage	2-stage	1-stage	2-stage	1-stage	2-stage	1-stage	2-stage	
Ratio <sup>a)</sup>	i	4-10	16-100	3-10	12-100	3-10	9-100	3-10	9-100	5-10	25-100	
Maximum torque <sup>a)</sup>	MF	$T_{2\alpha}$	Nm	18-22	51-60	128-160	320-365	640-700				
			in.lb	160-200	450-530	1130-1420	2800-3200	5700-6200				
Maximum torque <sup>a)</sup>	MA	$T_{2\alpha}$	Nm	-	60-62	168-185	370-380	-				
			in.lb	-	530-550	1490-1640	3300-3400	-				
Max. input speed	$n_{1max}$	min <sup>-1</sup>	10000	10000	8000	10000	7000	8000	6000	7000	4000	6000
Nominal input speed	$n_{1N}$	min <sup>-1</sup>	3800	4000	3300	3800	3100	3300	2300	3100	2000	2300
Max. radial force	$F_{2RMmax}$	N	600	1200	2000	3000	4400					
		lb <sub>f</sub>	140	270	450	680	1000					
Mean operating noise	$L_{pA}$	dB(A)	≤ 58	≤ 58	≤ 60	≤ 63	≤ 66					
Paint		Paint Pearl dark grey – innovation blue										
Direction of rotation		Motor and gearhead same direction										
Protection class		IP 64										
Page		6	8	10	12	14						

<sup>a)</sup> The maximum torques depend on the ratio

You can select a suitable adapter plate using the online configurator on [www.wittenstein-alpha.com](http://www.wittenstein-alpha.com)  
For application-specific sizing with cymex<sup>®</sup>, see [www.cymex.com](http://www.cymex.com) Please refer to the product pages for detailed information on individual gearhead sizes


**Account must be taken of the radial and axial forces at the output:**

Please also carry out steps 6 and 7 if forces are present at the output (e.g. if timing belt pulleys, pinions or levers are mounted there).

**Step 6 (if external forces are present):**

Determine the forces acting on the output and check the boundary conditions

- Radial force  $F_{2r} = \underline{\hspace{2cm}}$  [N]
- Radial force distance  $x_2 = \underline{\hspace{2cm}}$  [mm]
- Axial force  $F_{2a} = \underline{\hspace{2cm}}$  [N]
- Axial force distance  $y_2 = \underline{\hspace{2cm}}$  [mm]  
(required if  $F_{2a}$  is present)

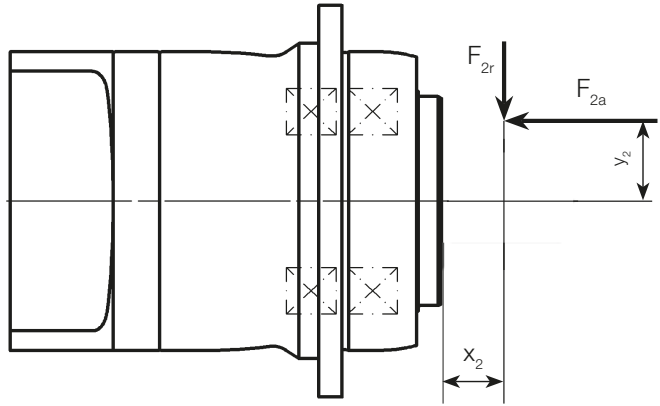

**Conditions if axial force  $F_{2a}$  is present:**

- 1.  $F_{2a} \leq 0.25 * F_{2r} \Rightarrow (\underline{\hspace{2cm}} \leq 0.25 * \underline{\hspace{2cm}})$   Met  Not met: Sizing with cymex®
- 2.  $y_2 \leq x_2 \Rightarrow (\underline{\hspace{2cm}} \leq \underline{\hspace{2cm}})$   Met  Not met: Sizing with cymex®

**Step 7:**


Determine the maximum equivalent force acting on the output  $F_{2_{eq}}$

$F_{2_{eq}} = F_{2r} + 0.25 * F_{2a} \leq F_{2RMax}$  ( $F_{2RMax}$  can be determined from the diagram below)

$F_{2_{eq}} = \underline{\hspace{2cm}} + 0.25 * \underline{\hspace{2cm}} \leq \underline{\hspace{2cm}}$

$F_{2_{eq}} = \underline{\hspace{2cm}}$  [N]  $\leq$   $\underline{\hspace{2cm}}$  [N]  Met

**Not met:** Higher axial and radial forces with the NPS, NPL and NPR.

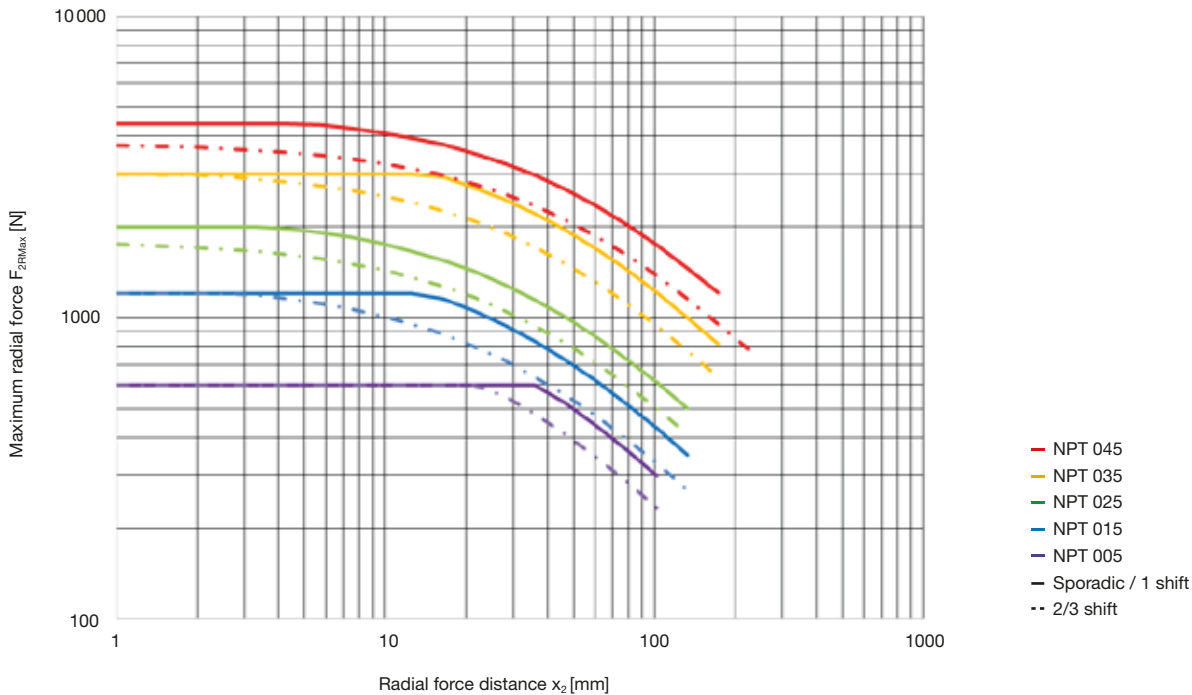

		1-stage					2-stage										
Ratio <sup>a)</sup>	i	4	5	7	8	10	16	20	25	28	35	40	50	64	70	100	
Maximum Torque	MF $T_{2st}$	Nm	18	22	22	21	21	18	18	22	18	22	18	22	21	22	21
		in.lb	160	200	200	180	184	160	160	200	160	200	160	200	180	200	180
Emergency stop torque <sup>b)</sup>	$T_{2Not}$	Nm	26														
		in.lb	230														
Nominal input speed <sup>c)</sup>	$n_{1N}$	min <sup>-1</sup>	3800		4300			4000			4300						
Max. input speed	$n_{1Max}$	min <sup>-1</sup>	10000					10000									
Max. torsional backlash	$j_t$	arcmin	Standard ≤ 10					Standard ≤ 13									
Max. axial force <sup>d)</sup>	$F_{2AMax}$	N	600														
		lb <sub>f</sub>	140														
Max. radial force <sup>d)</sup>	$F_{2RMax}$	N	600														
		lb <sub>f</sub>	140														
Weight incl. standard adapter plate <sup>e)</sup>	m	kg	0.9 - 1.4					1.1 - 1.7									
		lb <sub>m</sub>	2 - 3.1					2.4 - 3.8									
Operating noise <sup>f)</sup>	$L_{PA}$	dB(A)	≤ 58					≤ 58									
Max. permitted housing temperature	°C		+90														
	F		+194														
Ambient temperature	°C		-15 to +40														
	F		5 to 104														
Lubrication	Lubricated for life																
Paint	Housing: pearl dark grey / Drive-Side: Innovation Blue																
Direction of rotation	Motor and gearhead same direction																
Type of protection	IP 64																
Moment of inertia <small>(related to the drive)</small>	kgcm <sup>2</sup>		0.02 to 0.14					0.03 to 0.13									
	10 <sup>-3</sup> in.lb.s <sup>2</sup>		0.02 to 0.13					0.02 to 0.12									
Clamping hub diameter	Standard	mm	8(Z) 9(A) 11(B)					8(Z) 9(A) 11(B)									
	big		14(C)					14(C)									

<sup>a)</sup> Other ratios available on request.

<sup>b)</sup> Permitted 1000 times during the service life of the gearhead. If  $T_{2st} > T_{2Not}$ , then  $T_{2Not}$  is the maximum permitted value.

<sup>c)</sup> At  $T_{2N}$  and 20°C ambient temperature. Higher speeds possible if calculated using cymex®.

<sup>d)</sup> Refers to the center of the output shaft at  $n_2 = 150$  rpm.

<sup>e)</sup> Depending on the clamping hub diameter and the selected adapter plate.

<sup>f)</sup> At  $i=10$  and  $n_1=3000$  rpm at no load.

You can select a suitable adapter plate using the online configurator on [www.wittenstein-alpha.com](http://www.wittenstein-alpha.com)

Quick gearhead selection based on the motor characteristic\*:

Max. torque  $T_{2st} \geq T_{max\ motor} \cdot i$




\*Please refer to catalog pages 4 and 5 for detailed information on manual selection based on the application.

For application-specific sizing with cymex®, see [www.cymex.com](http://www.cymex.com)




Motor shaft diameter [mm]

1-stage

Up to 11<sup>4)</sup> (B)  
clamping hub diameter


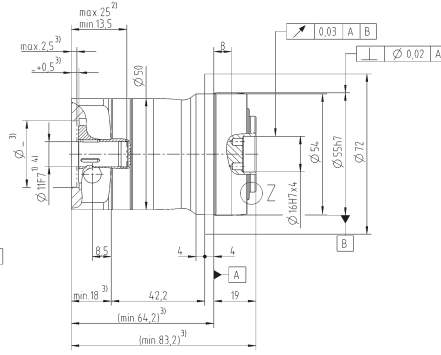



Up to 14<sup>4)</sup> (C)  
clamping hub diameter


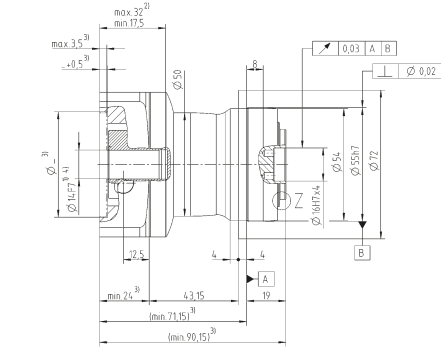



2-stage

Up to 11<sup>4)</sup> (B)  
clamping hub diameter

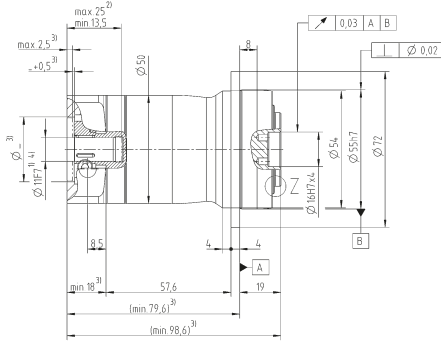

Up to 14<sup>4)</sup> (C)  
clamping hub diameter

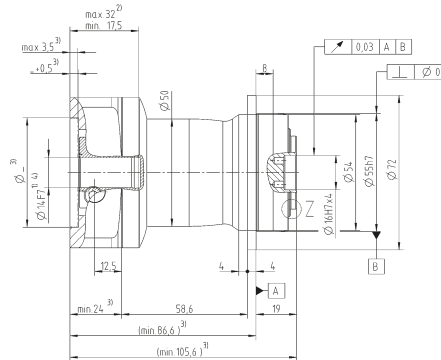

Non-tolerated dimensions  $\pm 1$  mm

- 1) Check motor shaft fit.
- 2) Min./max. permissible motor shaft length.  
Longer motor shafts are adaptable; please contact us.
- 3) The dimensions depend on the motor.
- 4) Smaller motor shaft diameters are compensated by a bushing with a minimum thickness of 1 mm.

Motor mounting according to operating manual



				1-stage						2-stage													
Ratio <sup>a)</sup>		i		3	4	5	7	8	10	12	15	16	20	25	28	30	32	35	40	50	64	70	100
Maximum torque	MF	$T_{2x}$	Nm	51	56	60	60	56	56	51	51	56	56	60	56	51	56	60	56	60	56	60	56
			in.lb	450	500	530	530	500	500	450	450	500	500	530	500	450	500	530	500	530	500	530	500
Maximum torque	HIGH TORQUE – MA	$T_{2x}$	Nm	62	62	-	-	-	-	62	62	62	62	-	62	62	-	-	62	-	-	-	-
			in.lb	550	550	-	-	-	-	550	550	550	550	-	550	550	-	-	550	-	-	-	-
Emergency stop torque <sup>b)</sup>		$T_{2Not}$	Nm	75																			
			in.lb	660																			
Nominal input speed <sup>c)</sup>		$n_{1N}$	min <sup>-1</sup>	3300				4000				3800					4300						
Max. input speed		$n_{1Max}$	min <sup>-1</sup>	8000						10000													
Max. torsional backlash		$j_t$	arcmin	Standard ≤ 8						Standard ≤ 10													
Max. axial force <sup>d)</sup>		$F_{2AMax}$	N	1380																			
			lb <sub>f</sub>	310																			
Max. radial force <sup>d)</sup>		$F_{2RMMax}$	N	1200																			
			lb <sub>f</sub>	270																			
Weight incl. standard adapter plate <sup>e)</sup>		m	kg	2 - 3.2						2.1 - 3.1													
			lb <sub>m</sub>	4.4 - 7.1						4.6 - 6.9													
Operating noise <sup>f)</sup>		$L_{PA}$	dB(A)	≤ 59						≤ 58													
Max. permitted housing temperature			°C	+90																			
			F	+194																			
Ambient temperature			°C	-15 to +40																			
			F	5 to 104																			
Lubrication				Lubricated for life																			
Paint				Housing: pearl dark grey / Drive-Side: Innovation Blue																			
Direction of rotation				Motor and gearhead same direction																			
Type of protection				IP 64																			
Moment of inertia (related to the drive)			kgcm <sup>2</sup>	0.1 to 0.6						0.02 to 0.15													
			10 <sup>-3</sup> in.lb.s <sup>2</sup>	0.1 to 0.5						0.02 to 0.13													
Clamping hub diameter	Standard		mm	9(A) 11(B) 14(C)						8(Z) 9(A) 11(B)													
				big	16(D) 19(E)						14(C)												

<sup>a)</sup> Other ratios available on request.

<sup>b)</sup> Permitted 1000 times during the service life of the gearhead. If  $T_{2x} > T_{2Not}$ , then  $T_{2Not}$  is the maximum permitted value.

<sup>c)</sup> At  $T_{2N}$  and 20°C ambient temperature. Higher speeds possible if calculated using cymex®.

<sup>d)</sup> Refers to the center of the output shaft at  $n_2 = 150$  rpm.

<sup>e)</sup> Depending on the clamping hub diameter and the selected adapter plate.

<sup>f)</sup> At  $i=10$  and  $n_1=3000$  rpm at no load.

You can select a suitable adapter plate using the online configurator on [www.wittenstein-alpha.com](http://www.wittenstein-alpha.com)

Quick gearhead selection based on the motor characteristic\*:




Max. torque  $T_{2x} \geq T_{max\ motor} \cdot i$

\*Please refer to catalog pages 4 and 5 for detailed information on manual selection based on the application.

For application-specific sizing with cymex®, see [www.cymex.com](http://www.cymex.com)




Motor shaft diameter [mm]

Up to 14<sup>4)</sup> (C)  
clamping hub diameter


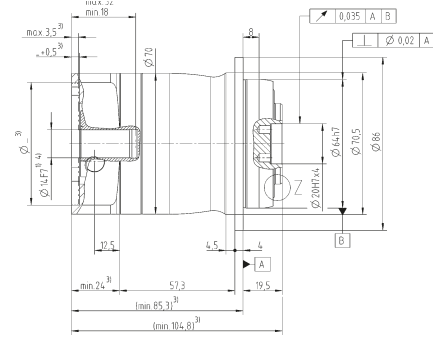



1-stage

Up to 19<sup>4)</sup> (E)  
clamping hub diameter


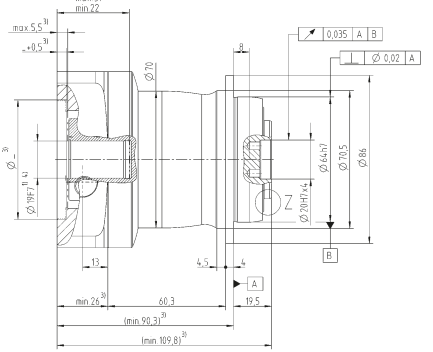



Up to 11<sup>4)</sup> (B)  
clamping hub diameter

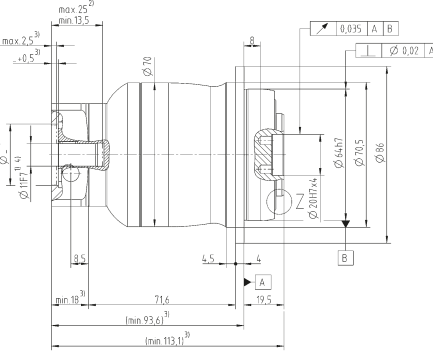

2-stage

Up to 14<sup>4)</sup> (C)  
clamping hub diameter

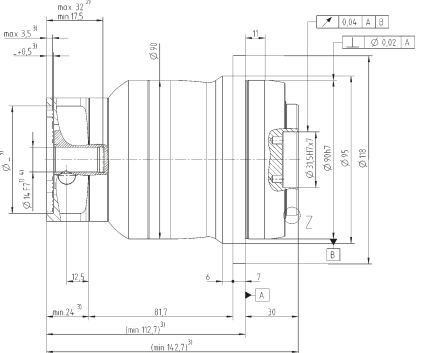

Non-tolerated dimensions  $\pm 1$  mm

- 1) Check motor shaft fit.
- 2) Min./max. permissible motor shaft length.  
Longer motor shafts are adaptable; please contact us.
- 3) The dimensions depend on the motor.
- 4) Smaller motor shaft diameters are compensated by a bushing with a minimum thickness of 1 mm.

⚠ Motor mounting according to operating manual

				1-stage						2-stage															
Ratio <sup>a)</sup>		i		3	4	5	7	8	10	9	12	15	16	20	25	28	30	32	35	40	50	64	70	100	
Maximum torque	MF	$T_{2x}$	Nm	128	152	160	160	144	144	128	128	128	152	152	160	152	128	152	160	152	160	144	160	144	
			in.lb	1130	1350	1420	1420	1270	1270	1130	1130	1130	1350	1350	1420	1350	1130	1350	1420	1350	1420	1350	1420	1270	1420
Maximum torque	HIGH TORQUE – MA	$T_{2x}$	Nm	185	185	-	-	-	-	185	185	185	184	184	-	184	168	-	-	184	-	-	-	-	-
			in.lb	1640	1640	-	-	-	-	1640	1640	1640	1630	1630	-	1630	1490	-	-	1630	-	-	-	-	-
Emergency stop torque <sup>b)</sup>	$T_{2Not}$		Nm	190																					
			in.lb	1700																					
Nominal input speed <sup>c)</sup>	$n_{1N}$		min <sup>-1</sup>	3100			3600			3300					4000										
Max. input speed	$n_{1Max}$		min <sup>-1</sup>	7000						8000															
Max. torsional backlash	$j_t$		arcmin	Standard ≤ 8						Standard ≤ 10															
Max. axial force <sup>d)</sup>	$F_{2AMax}$		N	1900																					
			lb <sub>f</sub>	430																					
Max. radial force <sup>d)</sup>	$F_{2RMMax}$		N	2000																					
			lb <sub>f</sub>	450																					
Weight incl. standard adapter plate <sup>e)</sup>	m		kg	4.4 - 6.7						4.7 - 6.7															
			lb <sub>m</sub>	9.7 - 14.8						10.4 - 14.8															
Operating noise <sup>f)</sup>	$L_{PA}$		dB(A)	≤ 61						≤ 59															
Max. permitted housing temperature			°C	+90																					
			F	+194																					
Ambient temperature			°C	-15 to +40																					
			F	5 to 104																					
Lubrication			Lubricated for life																						
Paint			Housing: pearl dark grey / Drive-Side: Innovation Blue																						
Direction of rotation			Motor and gearhead same direction																						
Type of protection			IP 64																						
Moment of inertia (related to the drive)			kgcm <sup>2</sup>	0.3 to 2.0						0.2 to 0.6															
			10 <sup>-3</sup> in.lb.s <sup>2</sup>	0.2 to 1.8						0.2 to 0.5															
Clamping hub diameter	Standard	mm	14(C) 16(D) 19(E)						9(A) 11(B) 14(C)																
	big		24(G) 28(H)						16 (D) 19(E)																

<sup>a)</sup> Other ratios available on request.

<sup>b)</sup> Permitted 1000 times during the service life of the gearhead. If  $T_{2x} > T_{2Not}$ , then  $T_{2Not}$  is the maximum permitted value.

<sup>c)</sup> At  $T_{2N}$  and 20°C ambient temperature. Higher speeds possible if calculated using cymex®.

<sup>d)</sup> Refers to the center of the output shaft at  $n_2 = 150$  rpm.

<sup>e)</sup> Depending on the clamping hub diameter and the selected adapter plate.

<sup>f)</sup> At  $i=10$  and  $n_1=3000$  rpm at no load.

You can select a suitable adapter plate using the online configurator on [www.wittenstein-alpha.com](http://www.wittenstein-alpha.com)

Quick gearhead selection based on the motor characteristic\*:


Max. torque  $T_{2x} \geq T_{max\ motor} \cdot i$

\*Please refer to catalog pages 4 and 5 for detailed information on manual selection based on the application.


For application-specific sizing with cymex®, see [www.cymex.com](http://www.cymex.com)

1-stage

Up to 19<sup>4)</sup> (E)  
clamping hub diameter

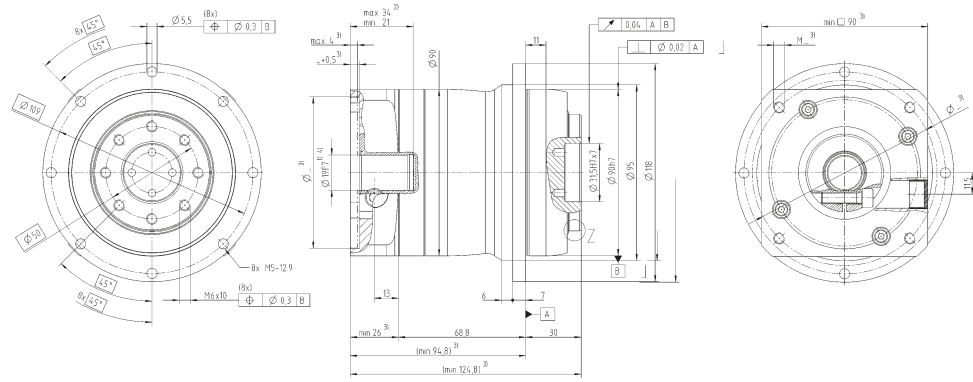


Up to 28<sup>4)</sup> (H)  
clamping hub diameter

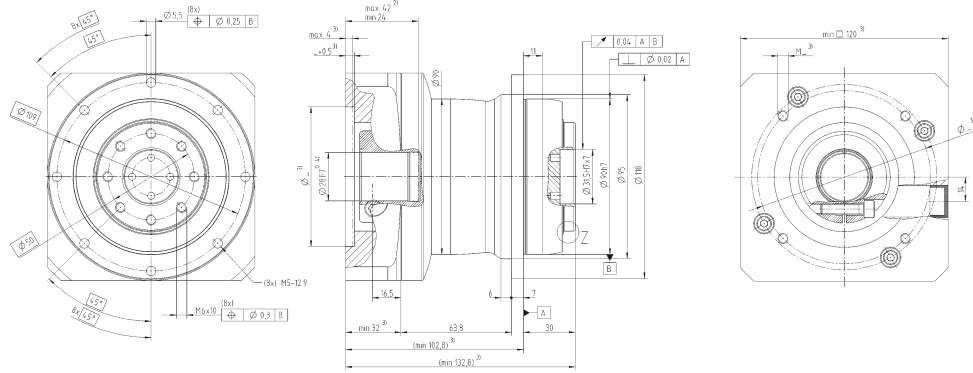


2-stage

Up to 14<sup>4)</sup> (C)  
clamping hub diameter

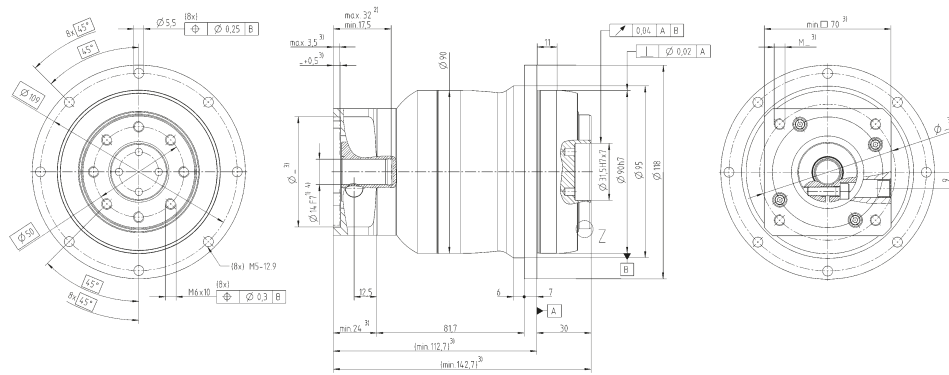

Up to 19<sup>4)</sup> (E)  
clamping hub diameter

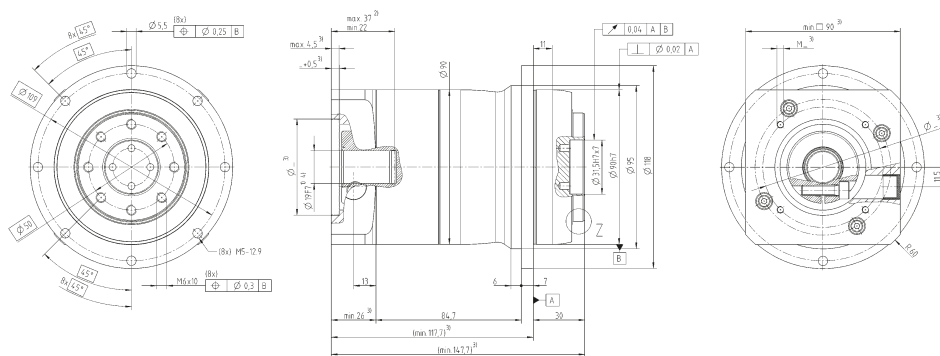

Non-tolerated dimensions  $\pm 1$  mm

- 1) Check motor shaft fit.
- 2) Min./max. permissible motor shaft length.  
Longer motor shafts are adaptable; please contact us.
- 3) The dimensions depend on the motor.
- 4) Smaller motor shaft diameters are compensated by a bushing with a minimum thickness of 1 mm.

Motor mounting according to operating manual

		1-stage										2-stage											
Ratio <sup>a)</sup>	i	3	4	5	7	8	10	9	12	15	16	20	25	28	30	32	35	40	50	64	70	100	
Maximum torque	MF	$T_{2x}$	Nm	320	365	365	365	352	320	320	320	365	365	365	365	320	365	365	365	365	352	365	352
			in.lb	2800	3200	3200	3200	3100	3100	2800	2800	2800	3200	3200	3200	3200	2800	3200	3200	3200	3200	3100	3200
Maximum torque	HIGH TORQUE – MA	$T_{2x}$	Nm	380	380	-	-	-	-	380	380	380	380	380	-	380	370	-	-	380	-	-	-
			in.lb	3400	3400	-	-	-	-	3400	3400	3400	3400	3400	-	3400	3300	-	-	3400	-	-	-
Emergency stop torque <sup>b)</sup>		$T_{2Not}$	Nm	480																			
			in.lb	4200																			
Nominal input speed <sup>c)</sup>	$n_{1N}$	min <sup>-1</sup>	2300				2800				3100				3600								
Max. input speed	$n_{1Max}$	min <sup>-1</sup>	6000						7000														
Max. torsional backlash	$j_t$	arcmin	Standard ≤ 8						Standard ≤ 10														
Max. axial force <sup>d)</sup>	$F_{2AMax}$	N	3500																				
		lb <sub>f</sub>	790																				
Max. radial force <sup>d)</sup>	$F_{2RMax}$	N	3000																				
		lb <sub>f</sub>	680																				
Weight incl. standard adapter plate <sup>e)</sup>	m	kg	9.4 - 15.3						9.8 - 14.9														
		lb <sub>m</sub>	21 - 34						22 - 33														
Operating noise <sup>f)</sup>	$L_{PA}$	dB(A)	≤ 65						≤ 61														
Max. permitted housing temperature	°C		+90																				
	F		+194																				
Ambient temperature	°C		-15 to +40																				
	F		5 to 104																				
Lubrication	Lubricated for life																						
Paint	Housing: pearl dark grey / Drive-Side: Innovation Blue																						
Direction of rotation	Motor and gearhead same direction																						
Type of protection	IP 64																						
Moment of inertia (related to the drive)	kgcm <sup>2</sup>		0.9 to 8.9						0.2 to 1.9														
	10 <sup>-3</sup> in.lb.s <sup>2</sup>		0.8 to 7.9						0.2 to 1.7														
Clamping hub diameter	Standard	mm	19(E) 24(G) 28(H)						14(C) 16(D) 19(E)														
	big		32(I) 38(K)						24(G) 28(H)														

<sup>a)</sup> Other ratios available on request.

<sup>b)</sup> Permitted 1000 times during the service life of the gearhead. If  $T_{2x} > T_{2Not}$ , then  $T_{2Not}$  is the maximum permitted value.

<sup>c)</sup> At  $T_{2N}$  and 20°C ambient temperature. Higher speeds possible if calculated using cymex®.

<sup>d)</sup> Refers to the center of the output shaft at  $n_2 = 150$  rpm.

<sup>e)</sup> Depending on the clamping hub diameter and the selected adapter plate.

<sup>f)</sup> At  $i=10$  and  $n_1=3000$  rpm at no load.

You can select a suitable adapter plate using the online configurator on [www.wittenstein-alpha.com](http://www.wittenstein-alpha.com)

Quick gearhead selection based on the motor characteristic\*:

Max. torque  $T_{2x} \geq T_{max\ motor} \cdot i$




\*Please refer to catalog pages 4 and 5 for detailed information on manual selection based on the application.

For application-specific sizing with cymex®, see [www.cymex.com](http://www.cymex.com)




Motor shaft diameter [mm]

1-stage

Up to 28<sup>4)</sup> (H) clamping hub diameter


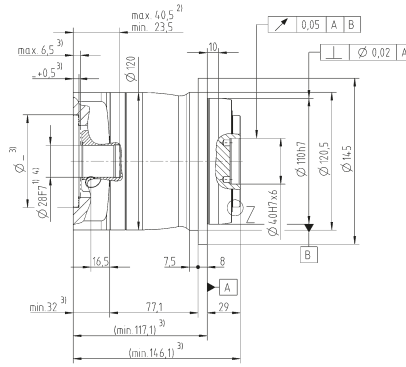



Up to 38<sup>4)</sup> (K) clamping hub diameter


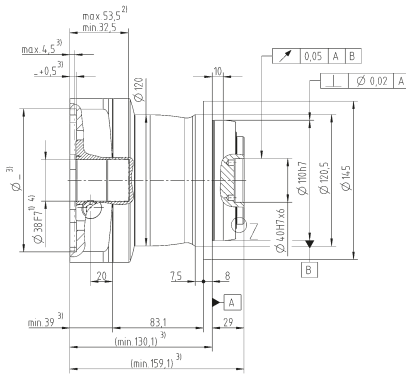



2-stage

Up to 19<sup>4)</sup> (E) clamping hub diameter

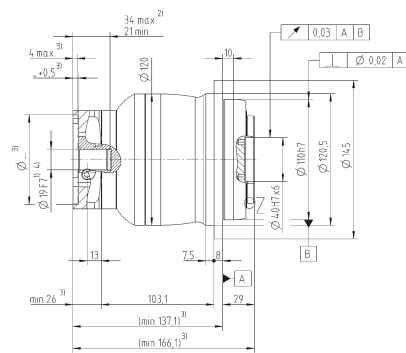

Up to 28<sup>4)</sup> (H) clamping hub diameter

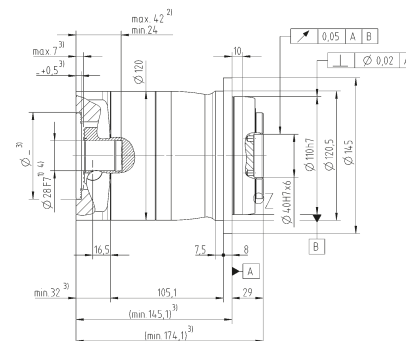

Non-tolerated dimensions  $\pm 1$  mm

- 1) Check motor shaft fit.
- 2) Min./max. permissible motor shaft length.  
Longer motor shafts are adaptable; please contact us.
- 3) The dimensions depend on the motor.
- 4) Smaller motor shaft diameters are compensated by a bushing with a minimum thickness of 1 mm.

Motor mounting according to operating manual

		1-stage				2-stage				
Ratio <sup>a)</sup>	i	5	8	10	25	32	50	64	100	
Maximum Torque	MF $T_{2st}$	Nm	700	640	640	700	640	700	640	640
		in.lb	6200	5700	5700	6200	5700	6200	5700	5700
Emergency stop torque <sup>b)</sup>	$T_{2Not}$	Nm	1000							
		in.lb	8900							
Nominal input speed <sup>c)</sup>	$n_{1N}$	min <sup>-1</sup>	2000	2200		2600				
Max. input speed	$n_{1Max}$	min <sup>-1</sup>	4000			6000				
Max. torsional backlash	$j_t$	arcmin	Standard ≤ 8			Standard ≤ 10				
Max. axial force <sup>d)</sup>	$F_{2AMax}$	N	3800							
		lb <sub>f</sub>	900							
Max. radial force <sup>d)</sup>	$F_{2RMax}$	N	4400							
		lb <sub>f</sub>	1000							
Weight incl. standard adapter plate <sup>e)</sup>	m	kg	19.3.5 - 25.3			19.8 - 29.3				
		lb <sub>m</sub>	43 - 56			44 - 65				
Operating noise <sup>f)</sup>	$L_{PA}$	dB(A)	≤ 68			≤ 65				
Max. permitted housing temperature	°C		+90							
	F		+194							
Ambient temperature	°C		-15 to +40							
	F		5 to 104							
Lubrication	Lubricated for life									
Paint	Housing: pearl dark grey / Drive-Side: Innovation Blue									
Direction of rotation	Motor and gearhead same direction									
Type of protection	IP 64									
Moment of inertia (related to the drive)	kgcm <sup>2</sup>		7.4 to 9.8			0.83 to 7.69				
	10 <sup>-3</sup> in.lb.s <sup>2</sup>		6.6 to 8.6			0.73 to 6.8				
Clamping hub diameter	Standard	mm	38(K)			19(E) 24(G) 28(H)				
	big		-			32(I) 38(K)				

<sup>a)</sup> Other ratios available on request.

<sup>b)</sup> Permitted 1000 times during the service life of the gearhead. If  $T_{2st} > T_{2Not}$ , then  $T_{2Not}$  is the maximum permitted value.

<sup>c)</sup> At  $T_{2st}$  and 20°C ambient temperature. Higher speeds possible if calculated using cymex®.

<sup>d)</sup> Refers to the center of the output shaft at  $n_2 = 150$  rpm.

<sup>e)</sup> Depending on the clamping hub diameter and the selected adapter plate.

<sup>f)</sup> At  $i = 10$  and  $n_1 = 3000$  rpm at no load.

You can select a suitable adapter plate using the online configurator on [www.wittenstein-alpha.com](http://www.wittenstein-alpha.com)

Quick gearhead selection based on the motor characteristic\*:




Max. torque  $T_{2st} \geq T_{max\ motor} \cdot i$

\*Please refer to catalog pages 4 and 5 for detailed information on manual selection based on the application.

For application-specific sizing with cymex®, see [www.cymex.com](http://www.cymex.com)




1-stage

Up to 38<sup>4)</sup> (K)  
clamping hub diameter


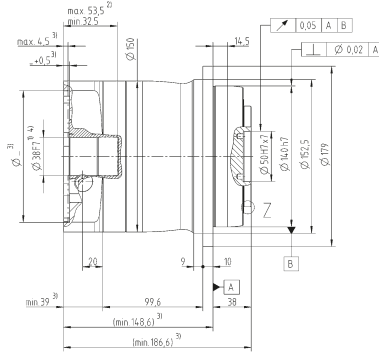



2-stage

Up to 28<sup>4)</sup> (H)  
clamping hub diameter

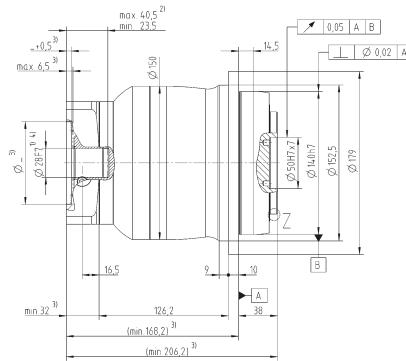

Up to 38<sup>4)</sup> (K)  
clamping hub diameter

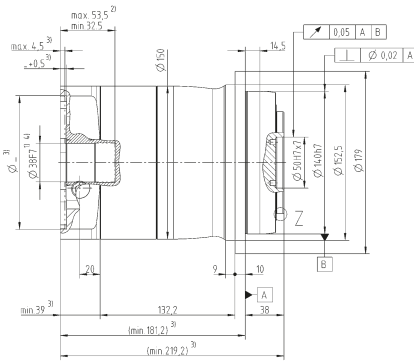

Non-tolerated dimensions  $\pm 1$  mm

- 1) Check motor shaft fit.
- 2) Min./max. permissible motor shaft length.  
Longer motor shafts are adaptable; please contact us.
- 3) The dimensions depend on the motor.
- 4) Smaller motor shaft diameters are compensated by a bushing with a minimum thickness of 1 mm.

⚠ Motor mounting according to operating manual



## Equivalent force at the output ( $F_{2\_eq}$ )

The equivalent force  $F_{2\_eq}$  at the output describes the decisive forces for gearhead selection.

## Equivalent application torque ( $T_{2\_eq}$ )

The equivalent application torque  $T_{2\_eq}$  describes the decisive torque for gearhead selection.

## Sizing factor ( $f_a$ )

The sizing factor  $f_a$  describes the influence of the daily operating time and the operating mode factor on the application torque.

## Operating mode factor ( $K_M$ )

The operating mode factor  $K_M$  describes the influence of the duty cycle, the number of cycles and the dynamics on the application torque.

## Moment of inertia (relates to the drive) (J)

The mass moment of inertia J is a measure of the effort applied by an object to maintain its momentary condition (at rest or moving).

## Operating noise ( $L_{PA}$ )

Low noise level  $L_{PA}$  is a factor of growing importance for environmental and health reasons. The gear ratio and speed both affect the noise level.

General rule:

A higher speed means a higher noise level, while a higher ratio means a lower noise level. The values specified in our catalog relate to gearheads with a ratio  $i = 10/100$  at a speed  $n = 3000$  rpm

## Max. radial force ( $F_{2R}$ )

The radial force  $F_{2R}$  is the force component acting at right angles to the output shaft with the NP, NPS, NPR and NPL or parallel to the output flange with the NPT. It acts perpendicular to the axial force and can assume an axial distance of  $x_2$  in relation to the shaft shoulder with the NP, NPS, NPR and NPL or to the shaft flange with the NPT, which acts as a lever arm. The lateral force produces a bending moment.

## Max. input speed ( $n_{1max}$ ) and nominal input speed ( $n_{1N}$ )

Two speeds are of relevance when sizing a gearhead: the maximum speed and the nominal speed at the input. The maximum permissible speed  $n_{1max}$  must not be exceeded because it serves as the basis for sizing  $\rightarrow$  cyclic operation. The nominal speed  $n_{1N}$  must not be exceeded in  $\rightarrow$  continuous operation. The housing temperature limits the nominal speed, which must not exceed  $90^\circ\text{C}$ . The nominal input speed specified in the catalogue applies to an ambient temperature of  $20^\circ\text{C}$ . As can be seen in the diagram below, the temperature limit is reached more quickly in the presence of an elevated outside temperature, in other words the nominal input speed must be reduced if the ambient temperature is high. The values applicable to your gearhead are available from WITTENSTEIN alpha on request.


## Max. output torque ( $T_{2\alpha}$ )

$T_{2\alpha}$  is the maximum torque which can be transmitted by the gearhead. This value may be lower, depending on the specific boundary conditions of the application.


## Emergency stop torque ( $T_{2Not}$ )

The emergency stop torque [Nm]  $T_{2Not}$  is the maximum permissible torque at the gearhead output and must not be reached more than 1000 times during the life of the gearhead. It must never be exceeded.

Further information can be found in the glossary of our current product catalog.

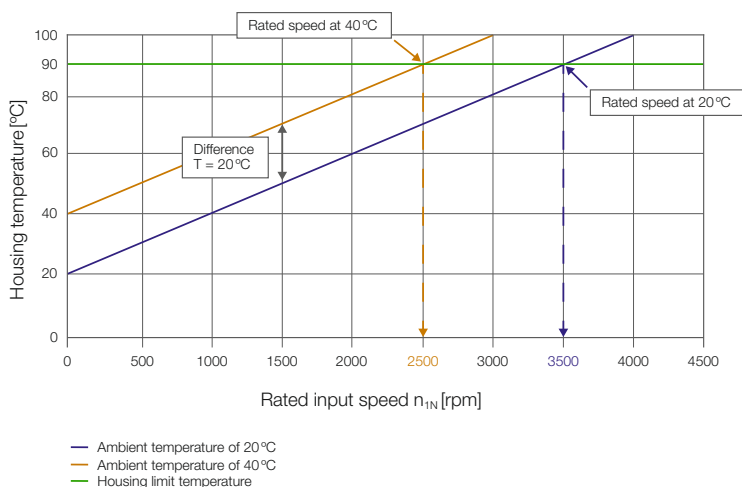

## Order codes for the alpha Value Line – NPT

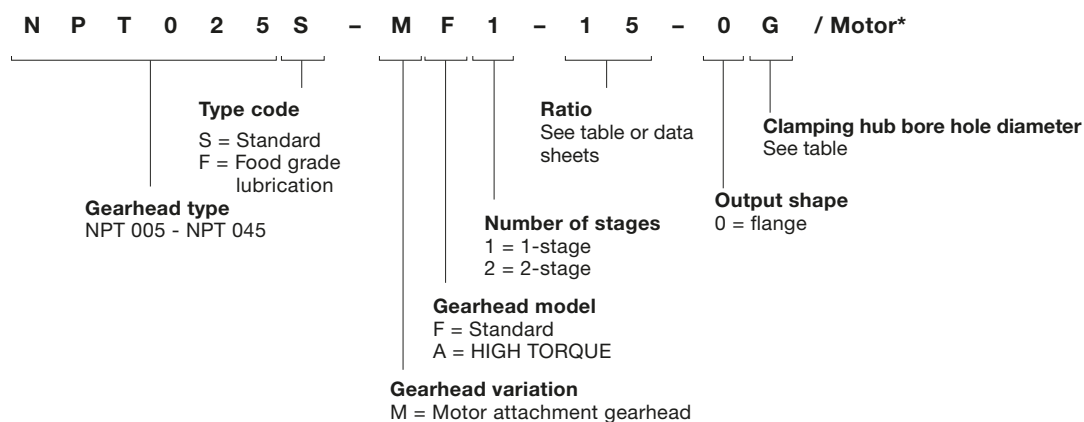

\*Full motor designation only required for determining attached gearhead components!

## Ratio and clamping hub diameter table

Size	Stages	Ratios	Clamping hub diameters* [mm]
005	1 stage	4, 5, 7, 8, 10	8 (Z), 9 (A), 11 (B), 14 (C)
	2 stage	16, 20, 25, 28, 35, 40, 50, 64, 70, 100	8 (Z), 9 (A), 11 (B), 14 (C)
015	1 stage	3, 4, 5, 7, 8, 10	9 (A), 11 (B), 14 (C), 16 (D), 19 (E)
	2 stage	12, 15, 16, 20, 25, 28, 30, 32, 35, 40, 50, 64, 70, 100	8 (Z), 9 (A), 11 (B), 14 (C)
025	1 stage	3, 4, 5, 7, 8, 10	14 (C), 16 (D), 19 (E), 24 (G), 28 (H)
	2 stage	9, 12, 15, 16, 20, 25, 28, 30, 32, 35, 40, 50, 64, 70, 100	9 (A), 11 (B), 14 (C), 16 (D), 19 (E)
035	1 stage	3, 4, 5, 7, 8, 10	19 (E), 24 (G), 28 (H), 32 (I), 38 (K)
	2 stage	9, 12, 15, 16, 20, 25, 28, 30, 32, 35, 40, 50, 64, 70, 100	14 (C), 16 (D), 19 (E), 24 (G), 28 (H)
045	1 stage	5, 8, 10	38 (K)
	2 stage	25, 32, 50, 64, 100	19 (E), 24 (G), 28 (H), 32 (I), 38 (K)


\*Intermediate diameters are possible in combination with a bushing with a minimum thickness of 1 mm.



WITTENSTEIN alpha GmbH · Walter-Wittenstein-Straße 1 · 97999 Igersheim · Tel. +49 7931 493-0 · info@wittenstein-alpha.com

## WITTENSTEIN alpha – intelligent drive systems

[www.wittenstein-alpha.com/alpha-value-line](http://www.wittenstein-alpha.com/alpha-value-line)

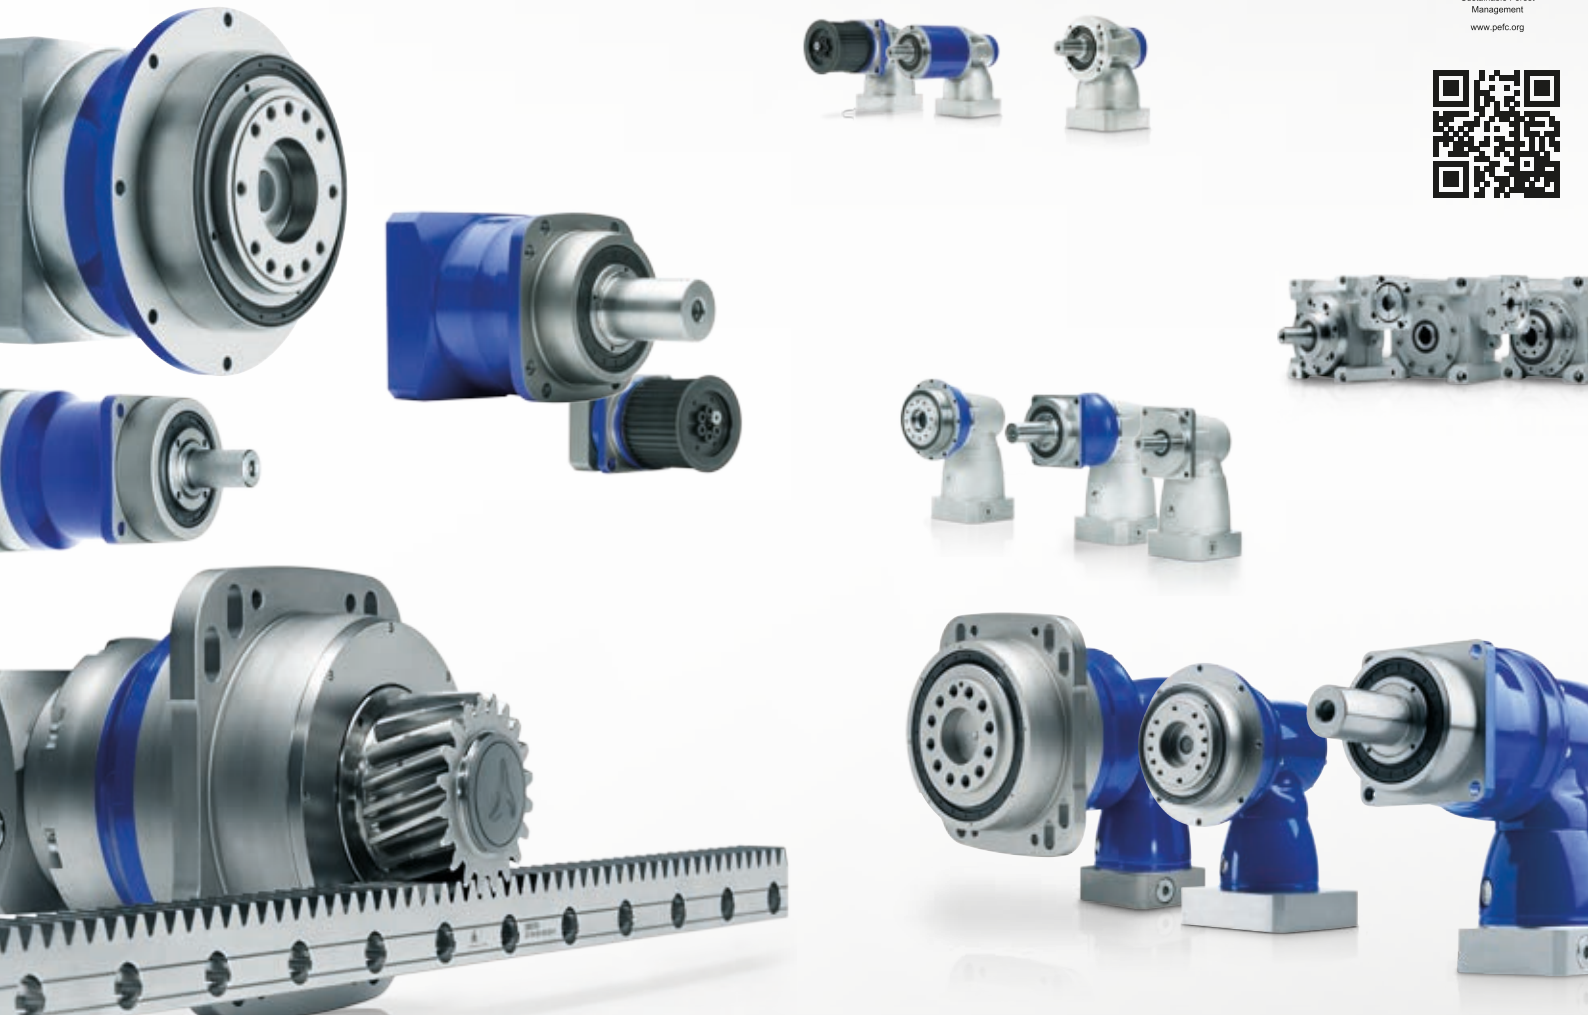

WITTENSTEIN alpha\_Value\_Line\_NPL\_en\_03\_2016\_J Technical changes reserved