


**Motor Specifications**

1	Drive Input power supply		208~240VAC
2	Basic DC Bus Voltage	V (DC)	320V
3	Rated Output Power	Watts	2000
4	Rated Speed	rpm	3000
5	Max. Mechanical Speed	rpm	5600
6	Rated Torque	Nm	6.4
7	Continuous Stall Torque	Nm	7.1
8	Peak Torque	Nm	19.2
9	Rated Current	A (rms)	12.7
10	Continuous Stall Current	A (rms)	12.7
11	Peak Current	A (rms)	44
12	Voltage Constant ±10%	V(rms)/K rpm	34.2
13	Torque Constant ±10%	Nm/A(rms)	0.565
14	Winding Resistance(Line-Line)±10%	Ohm @20°C	0.3
15	Winding Inductance(Line-Line)±20%	mH	3.45
16	Inertia	kg m <sup>2</sup>	0.000298
17	Thermal Resistance(mounted)	°C / W	1.04
18	Thermal Time Constant	Minutes	24
19	Heat Sink Size(Aluminum)	mm	300×300×12
20	Shaft Load - Axial	N (max.)	90N /20.2 Lbf
21	Shaft Load - Radial(End of Shaft)	N (max.)	270 N / 60.6 Lbf
22	Weight	kg	5.2 kg /11.5Lb
23	Approvals	CE,ULUS,RoHS	
24	Encoder Resolution & Protocol	21bit Absolute Multi-turn TMGW Protocol	
25	Encoder Type	Magnetic	
26	Insulation Class	F (155°C)	
27	IP rating	IP65(except shaft through hole and cable end connector)	
28	Installation Location	Indoors, free from direct sunlight, corrosive gas, inflammable gas	
29	Ambient Temperature	Operating 0 to 40°C, Storage -20 to 80°C	
30	Ambient Humidity (max.)	85% (free from condensing)	
31	Altitude (max.)	1000 m	
32	Vibration Resistance	10-150Hz 49 m/s <sup>2</sup>	
33	Rotor Poles	10	

Shaft Load: (L<sub>10</sub> life, 20,000 hours, 2,000 RPM)



**Motor Phases**

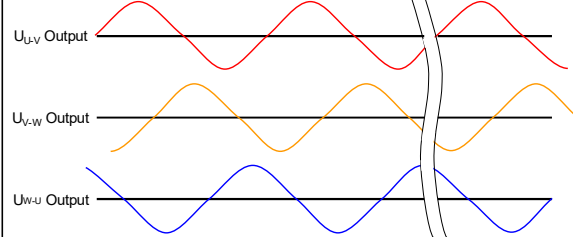


All the timing logics are obtained in CCW rotation as viewed from front shaft.

**Notes:**

1. A shaft seal is shipped with motor, but not installed.
2. A KEY is shipped with motor, but not installed.

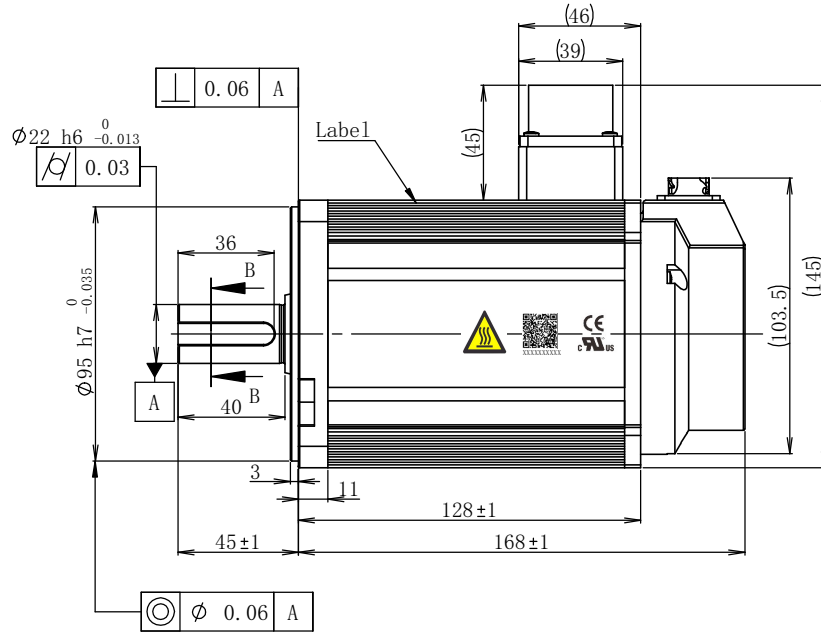


Motor Power Connector:  
XMS3102A20-18S(EUMACX)




View A

Pin#	A	B	C	D	E
Signal	GND	W	N/C	N/C	N/C
Pin#	F	G	H	I	
Signal	U	N/C	N/C	V	

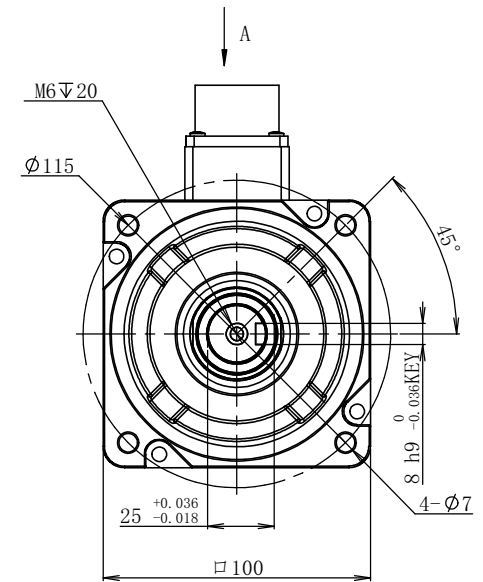

Encoder Connector:  
XM10-S10S-C(EUMACX)



View A

Pin#	1	2	3	4	5
Signal	5V	GND	SD-	SD+	Battery+
Pin#	6	7	8	9	10
Signal	Battery-	N/C	N/C	N/C	Shield

Item Number  
S0034

Unit: mm First Angle Method	AI	1	2023.11.30	 <b>MOONS'</b> moving in better ways	SM3L-104AXNUV			
Tolerances for linear and angular dimensions without individual tolerance indications GB/T 1804-m eqv ISO 2768-1:m	AO	Preliminary	2023.08.07		4611170001630			
Geometrical tolerance for features without individual tolerance indications GB/T 1184-K eqv ISO 2768-2:K	REV	Sign	Quantity	ECN NO.	Date	Stage	Quality	Scale
UNLESS OTHERWISE SPECIFIED	Design			Technology		D		1:2
	Standard			Audit		Sheet		1 of 1
	Check			Approve		Shanghai AMP & MOONS' Automation Co.,Ltd		
	Marketing Dep	<input type="checkbox"/>		Date				